

Permobil

Heavy duty products



permobil



Up to 8" of seat elevation

Base width: 26"
Base length: 38"

Permobil M300 Corpus® HD

The M300 Corpus HD takes all the things you love about Permobil's mid-wheel drive and amplifies them. Outfitted with stronger actuators, more powerful motors, and a reinforced Corpus seating system, it's built to withstand the rigours of an active heavy duty lifestyle. Designed specifically for users up to 204 kg, the suspension has been strengthened to provide you with more stability and completed with elegant features like fully adjustable legrests and up to four power seat functions.



Weight capacity— 204 kg


Specifications

Max user weight	204 kg
Max speed	8 km/h
Range	32.2 km*
Base width	26"
Base length	38"
Seat-to-floor height	18", 19", 20" (elevator) 18", 19", 20" (fixed)
Base turning radius	22"
Ground clearance	3"
Recommended battery type	Group 34 or 24
Weight including batteries	193 kg (Group 34) 202 kg (Group 24)
Drive electronics	R-Net 120A

Optional seat elevator	8"
Tilt options	Posterior: 0° – 45°
Backrest angle - power recline	85° – 150°
Legrest angle - power	85° – 175°
Seat depth	19" – 25" (by 1" incr.)
Seat width	19", 21", 23", 25"
Backrest height	21", 24" – 29" (by 1" incr.)

* Actual driving range will vary based on driving and battery conditions.
All specifications may vary based upon configuration.
Chair weights are approximate and include base, batteries, power seat functions and seating system without accessories.

Color options

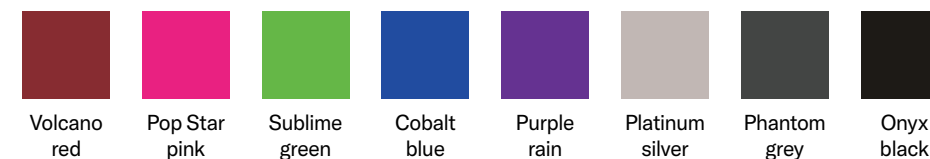

Volcano red Pop Star pink Sublime green Cobalt blue Purple rain Platinum silver Phantom grey Onyx black

Permobil M3 Corpus

Meticulously engineered to help you maintain better positioning, feel more secure and reduce driving fatigue so you can conquer daily activities with ease. Its compact base offers maneuverability in tight spaces without sacrificing performance. Featuring the innovative FlexLink suspension geometry with independent caster swing-arms helping to keep you stable and in control as you traverse the obstacles in your world at up to 10 km/h.



Specifications

Max user weight	150 kg
Max speed	10 km/h
Range	32.2 km*
Base width	24"
Base length	35.5"
Seat-to-floor height	17.5", 18.5", 19.5"
Base turning radius	20.5"
Ground clearance	3"
Recommended battery type	Group 34 or 24
Weight including batteries	175 kg (Group 34) 185 kg (Group 24)
Drive electronics	R-Net 120A
Optional seat elevator	12"

Tilt options	Posterior: 0° – 50° ActiveReach: 5°, 10° & 20° (up to 136 kg)
Backrest angle - power recline	85° – 180°
Legrest angle - power	85° – 180°
Seat depth	14" – 22" (1" incr.)
Seat width	17" – 23" (2" incr.)
Backrest height	20", 23" – 28" (1" incr.)

* Actual driving range will vary based on driving and battery conditions.
All specifications may vary based upon configuration.
Chair weights are approximate and include base, batteries, power seat functions and seating system without accessories.

Colour options



Premium options



Permobil M5 Corpus

Take control with high-performance motors enabling a top speed of 10 km/h and exceptional low-end torque that lets you pivot like a pro. Experience unsurpassed stability and ride comfort with FlexLink Pro independent drive wheel suspension. The M5 Corpus will take you to new heights with increased stability and full suspension in seat elevation.

Up to 14" of ActiveHeight™ & 20° of ActiveReach™

Base width: 25"
Base length: 37.5"



Weight capacity— 150 kg

Specifications

Max user weight	150 kg
Max speed	10 km/h
Range	32.2 km*
Base width	25"
Base length	37.5"
Seat-to-floor height	17.5", 18.5", 19.5"
Base turning radius	21.5"
Ground clearance	3"
Recommended battery type	Group 24
Weight including batteries	192 kg
Drive electronics	R-Net 120A
Optional seat elevator	14"

Tilt options	Posterior: 0° – 50°
	ActiveReach: 5°, 10° & 20° (up to 136 kg)

Backrest angle - power recline	85° – 180°
Legrest angle - power	85° – 180°
Seat depth	14" – 22" (1" incr.)
Seat width	17" – 23" (2" incr.)
Backrest height	20", 23" – 28" (1" incr.)

* Actual driving range will vary based on driving and battery conditions. All specifications may vary based upon configuration. Chair weights are approximate and include base, batteries, power seat functions and seating system without accessories.

Colour options



Chili Sunset Canary Spring Aqua Sky Violet Flamingo Arctic Midnight Gold Platinum Bronze

Premium options



Permobil F3 Corpus

The F3 Corpus with a 10 km/h top-end speed features optimised battery weight distribution, lower centre of mass, and fully adjustable ComfortRide suspension that improve stability while traversing inclines or declines. Experience the enhanced functionality that combines outstanding chassis performance with Permobil's industry-leading Corpus seating system.



Specifications

Max user weight	150 kg	Drive electronics	R-Net 120A
Max speed	10 km/h 8 km/h	Optional seat elevator	12"
Range	32.2 km*	Tilt options	Posterior: 0° – 50° ActiveReach: 5°, 10°, 20° & 30°
Base width	24"	Backrest angle - power recline	85° – 180°
Base length	40" with support wheels 36" without support wheels	Legrest angle - power	85° – 180°
Seat-to-floor height	17.5", 18.5", 19.5"	Seat depth	14" – 22" (1" incr.)
Base turning radius	26.5"	Seat width	17" – 23" (2" incr.)
Ground clearance	3"	Backrest height	20", 23" – 28" (1" incr.)
Recommended battery type	Group 34 or 24	<i>* Actual driving range will vary based on driving and battery conditions. All specifications may vary based upon configuration. Chair weights are approximate and include base, batteries, power seat functions and seating system without accessories.</i>	
Weight including batteries	175 kg (Group 34) 184 kg (Group 24)		


Colour options



Premium options

Permobil F5 Corpus

Power meets performance on the F5 Corpus with a 10 km/h top-end speed and upgraded ComfortRide Pro suspension. All-wheel independent, fully adjustable, oil dampened shocks provide the ultimate in ride comfort and reduced vibration while driving in all seat positions, including an unprecedented 14" ActiveHeight seat elevation. Climb and reach higher with increased obstacle negotiation, exceptional motor torque, and enhanced stability allowing up to 45° of ActiveReach forward tilt functionality.

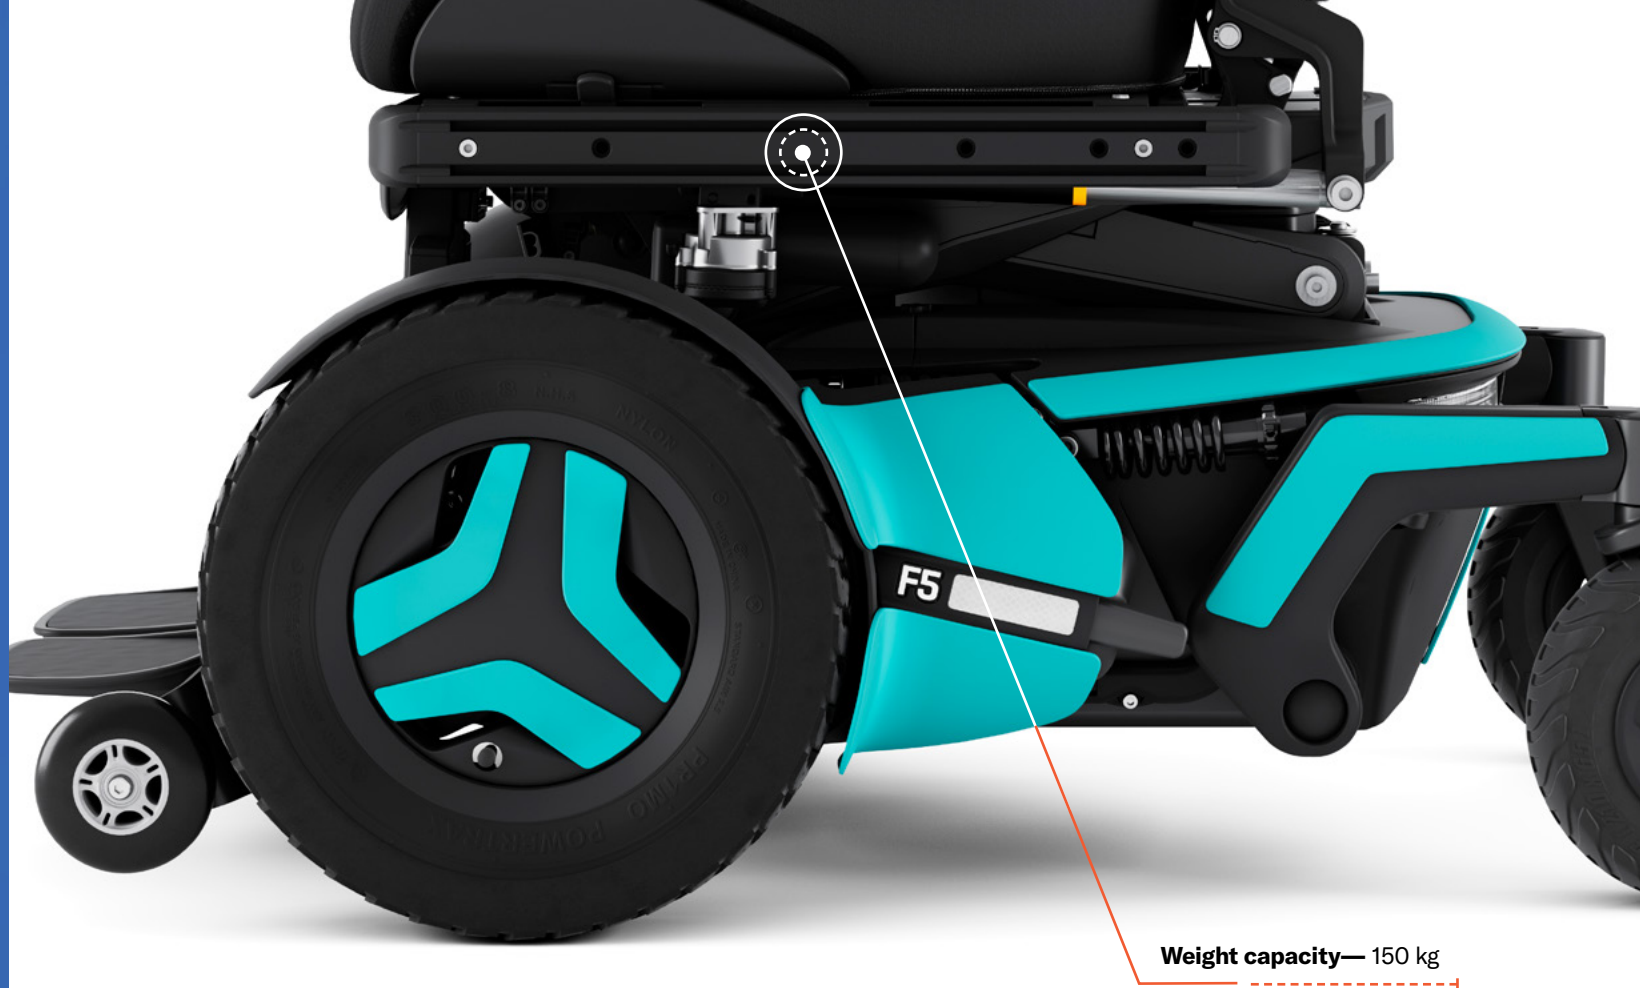


Specifications

Max user weight	150 kg
Max speed	10 km/h
Range	32.2 km*
Base width	25.5"
Base length	42" with support wheels 38" without support wheels
Seat-to-floor height	17.5", 18.5", 19.5"
Base turning radius	30"
Ground clearance	3"
Recommended battery type	Group 24
Weight including batteries	186 kg
Drive electronics	R-Net 120A
Optional seat elevator	14"

Tilt options	Posterior: 0° – 50° ActiveReach: 5°, 10°, 20°, & 45°
Backrest angle - power recline	85° – 180°
Legrest angle - power	85° – 180°
Seat depth	14" – 22" (1" incr.)
Seat width	17" – 23" (2" incr.)
Backrest height	20", 23" – 28" (1" incr.)


* Actual driving range will vary based on driving and battery conditions. All specifications may vary based upon configuration. Chair weights are approximate and include base, batteries, power seat functions and seating system without accessories.

Colour options



Chili Sunset Canary Spring Aqua Sky Violet Flamingo Arctic Midnight

Premium options



Gold Platinum Bronze

TiLite Aero T

Our most advanced aluminium chair is uniquely modelled and handmade to each user's specifications. The dual-tube frame of the Aero T provides superior rigidity, while minimising weight and maximising performance. Thanks to the TiFit process, you get an optimised fit plus adjustability that meets your needs.



Note: The ROHO® AGILITY Active Carbon back supports up to 120 kg.



Weight capacity— 159 kg


Specifications

Max user weight	120 kg standard 159 kg heavy duty	Camber	0°, 2°, 4°, or 6°
Frame features	Titanium dual-tube rigid, TiFit, full adjustability	Center of gravity adjustment	5"
Total chair width*	23"	Front seat width (seat taper)	0", 1", 2", 3"
Seat width	12" – 20"	Precision lock folding seat back	Adj. height: 9.5" – 22" Adj. angle: 80° – 101°
Seat depth	12" – 20"	Ergonomic seat	6", 7", 8"
Front seat height	15" – 21"	Transit options	Transport Bracket
Rear seat height	13" – 20"	Transport weight*	5.4 kg
Front frame angle	70°, 75°, 80°, 85°, or 90°	Warranty	Five years on frame One year on TiLite components

*Weights and widths based on 16" x 16" chair with 0° camber, minimum rear wheel spacing and all standard features. Rear wheels are not included in transport weight. For reference, a pair of standard 24" rear wheels weighs 3.3 kg.


Frame colours

High gloss paint




TiLite red Neon pink High gloss black

Candy paint




Ruby red Azure blue Electric plum

Metallic paint



Tangerine metallic Acid green metallic Ocean blue metallic

Matte textured paint




Flame orange OD green Hyper blue

Matte paint



Titanium grey Black lava Midnight blue pearl


Pearlescent paint



White pearl

Component colours

Anodised

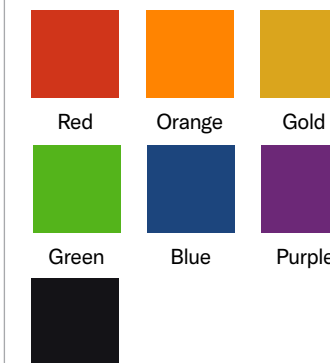

Red Orange Gold

Green Blue Purple

Black



TiLite TRA

With the power and style of its titanium dual-tube frame, plus TiFit precision for an exact fit, the TRA provides performance and adjustability made just for you.



Weight capacity— 159 kg


Specifications

Max user weight	120 kg standard 159 kg heavy duty	Camber	0°, 2°, 4°, or 6°
Frame features	Titanium dual-tube rigid, TiFit, full adjustability	Center of gravity adjustment	5"
Total chair width*	23"	Front seat width (seat taper)	0", 1", 2", 3"
Seat width	12" – 20"	Precision lock folding seat back	Adj. height: 9.5" – 22" Adj. angle: 80° – 101°
Seat depth	12" – 20"	Ergonomic seat	6", 7", 8"
Front seat height	15" – 21"	Transit options	Transport Bracket
Rear seat height	13" – 20"	Transport weight*	5 kg
Front frame angle	70°, 75°, 80°, 85°, or 90°	Warranty	Five years on frame One year on TiLite components

* Weights and widths based on 16" x 16" chair with 0° camber, minimum rear wheel spacing and all standard features. Rear wheels are not included in transport weight. For reference, a pair of standard 24" rear wheels weighs 3.3 kg.


Frame colours

High gloss paint

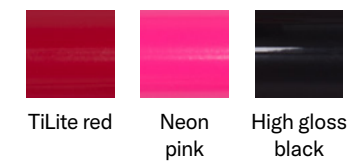


TiLite red Neon pink High gloss black

Candy paint

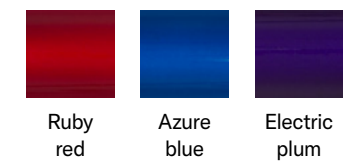


Ruby red Azure blue Electric plum

Metallic paint

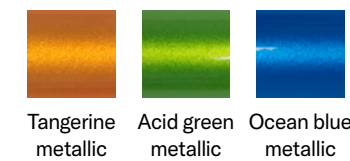


Tangerine metallic Acid green metallic Ocean blue metallic

Matte textured paint

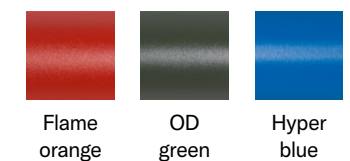

Flame orange OD green Hyper blue

Matte paint

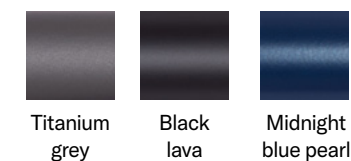


Titanium grey Black lava Midnight blue pearl

Pearlescent paint



White pearl Satin


Natural titanium

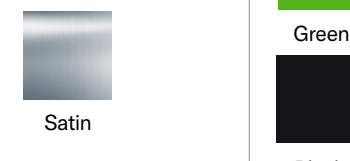

Green Blue Purple Black

Component colours

Anodised

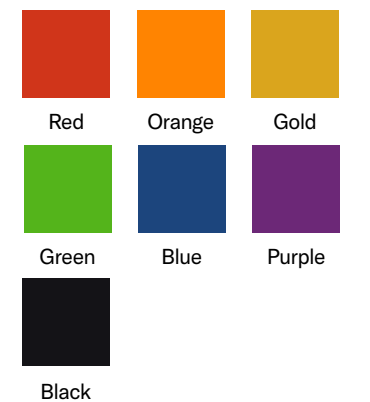

Red Orange Gold
Green Blue Purple
Black

TiLite ZRA

With full adjustability and a minimalist mono-tube frame, the ZRA dishes out style without boundaries. With its TiFit titanium frame, you have the complete package: strength, style, and the ability to set up and configure your chair just for you.



Weight capacity— 136 kg




Specifications

Max user weight	120 kg standard 136 kg heavy duty	Camber	0°, 2°, 4°, or 6°
Frame features	Titanium mono-tube rigid, TiFit, full adjustability	Center of gravity adjustment	6"
Total chair width*	23"	Front seat width (seat taper)	0", 1.5", 2.5"
Seat width	10" – 20"	Precision Lock folding seat back	Adj. height: 9.5" – 22" Adj. angle: 80° – 101°
Seat depth	10" – 20"	Ergonomic seat	6", 7", 8"
Front seat height	16" – 21"	Transit options	Transit tie-down
Rear seat height	12.5" – 20"	Transport weight*	4.8 kg
Front frame angle	70°, 75°, 80°, 85°, or 90°	Warranty	Five years on frame One year on TiLite components

*Weights and widths based on 16" x 16" chair with 0° camber, minimum rear wheel spacing and all standard features. Rear wheels are not included in transport weight. For reference, a pair of standard 24" rear wheels weighs 3.3 kg.


Frame colours

High gloss paint




TiLite red Neon pink High gloss black

Candy paint




Ruby red Azure blue Electric plum

Metallic paint




Tangerine metallic Acid green metallic Ocean blue metallic

Matte textured paint




Flame orange OD green Hyper blue

Matte paint



Titanium grey Black lava Midnight blue pearl

Pearlescent paint




White pearl Satin

Natural titanium

Component colours

Anodised

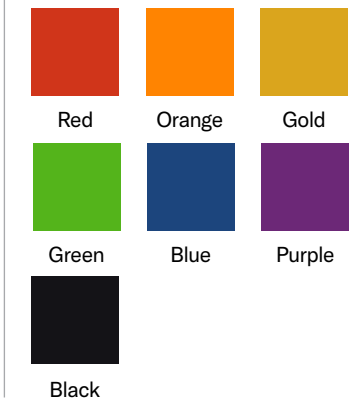

Red Orange Gold
Green Blue Purple
Black



TiLite ZR

With the ZR's minimalist mono-tube frame, less truly is more. The clean aesthetic of the ZR turns heads while the titanium frame makes sure you have the strength and vibration-dampening ride to go with your beauty. Style and strength to take on whatever life throws at you.



Weight capacity— 136 kg


Specifications

Max user weight	120 kg standard 136 heavy duty	Center of gravity adjustment	2.25"
Frame features	Titanium dual-tube rigid, TiFit, limited adjustability	Front seat width (seat taper)	0", 1.5", 2.5"
Total chair width*	23"	Precision lock folding seat back	Adj. height: 9.5" – 22" Adj. angle: 80° – 101°
Seat width	10" – 20"	Fixed seat back	Fixed height: 8" – 20" Fixed angle: 80° – 101°
Seat depth	10" – 20"	Ergonomic seat	4" – 10"
Front seat height	16" – 21"	Transit options	Transport bracket
Rear seat height	12.5" – 20"	Transport weight*	4.2 kg
Front frame angle	70°, 75°, 80°, 85°, or 90°	Warranty	Five years on frame One year on TiLite components
Camber	0°, 2°, 4°, 6°, 8°, or 12°		

* Weights and widths based on 16" x 16" chair with 0° camber, minimum rear wheel spacing and all standard features. Rear wheels are not included in transport weight. For reference, a pair of standard 24" rear wheels weighs 3.3 kg.


Frame colours

High gloss paint




TiLite red
Neon pink
High gloss black

Candy paint




Ruby red
Azure blue
Electric plum

Metallic paint




Tangerine metallic
Acid green metallic
Ocean blue metallic

Matte textured paint



Flame orange
OD green
Hyper blue

Matte paint




Titanium grey
Black lava
Midnight blue pearl

Pearlescent paint



White pearl
Satin


Natural titanium



Black

Component colours

Anodised

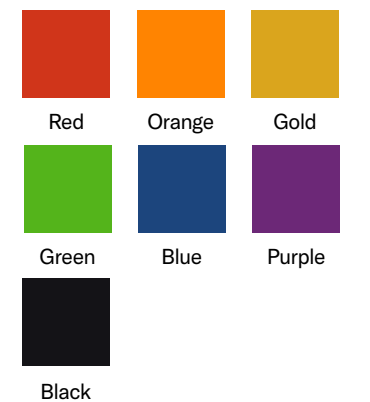

Red
Orange
Gold
Green
Blue
Purple
Black

TiLite Aero X

The Aero X features an innovative modular design with clean modern lines and configurability. Featuring multiple configurations that include heavy duty, hemi-height, and amputee options. Add superior rolling dynamics and full adjustability, and you get a chair that excels in both performance and price.




Specifications

Max user weight	120 kg standard 159 kg heavy duty	Front frame angle	Fixed front: 70°, 80°, or 85° Swing-away: 70°, 80°, or 85°
Frame features	Aluminium box folding frame, modular design, full adjustability	Camber	0°, 2°, 4°, or 6°
Total chair width folded*	10.5"	Center of gravity adjustment	6"
Total chair width*	22.5"	Fixed seat back	Fixed height: 11" – 20"
Seat width	12" – 22"	Transit options	Transit tie-down, transport bracket
Seat depth	12" – 20"	Transport weight*	Fixed front: 7 kg Swing-away: 8.2 kg
Front seat height	13.5" – 21.5"	Warranty	Five years on frame One year on TiLite components
Rear seat height	13" – 20"		

* Weights and widths based on 16" x 16" chair with 0° camber, minimum rear wheel spacing and all standard features. Rear wheels are not included in transport weight. For reference, a pair of standard 24" rear wheels weighs 3.3 kg.


Frame colours

High gloss paint

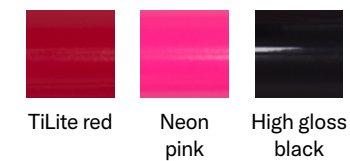


TiLite red Neon pink High gloss black

Candy paint




Ruby red Azure blue Electric plum

Metallic paint

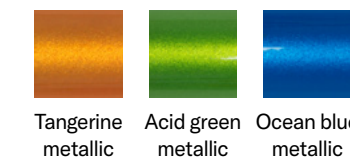


Tangerine metallic Acid green metallic Ocean blue metallic

Matte textured paint

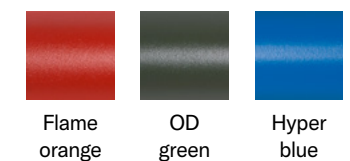


Flame orange OD green Hyper blue

Matte paint



Titanium grey Black lava Midnight blue pearl

Pearlescent paint



White pearl



TiLite 2GX

The TiLite 2GX combines the advantages of a modular folding frame with the high strength and vibration-dampening characteristics of titanium. Add in the Tru-Fit full adjustability that meets your needs and you are ready to roll in a chair designed to empower you.




Specifications

Max user weight	120 kg standard 159 kg heavy duty	Front frame angle	Fixed front: 70°, 80°, or 85° Swing-away: 70°, 80°, or 85°
Frame features	Titanium box folding frame, modular design, full adjustability	Camber	0°, 2°, 4°, or 6°
Total chair width folded*	10.75"	Center of gravity adjustment	6"
Total chair width*	23"	Fixed seat back	Fixed height: 11" – 20"
Seat width	18" – 22"	Transit options	Transport bracket
Seat depth	16" – 20"	Transport weight*	Fixed front: 5.9 kg Swing-away: 7 kg
Front seat height	13.5" – 21"	Warranty	Five years on frame One year on TiLite components
Rear seat height	13" – 20"		

* Weights and widths based on 16" x 16" chair with 0° camber, minimum rear wheel spacing and all standard features. Rear wheels are not included in transport weight. For reference, a pair of standard 24" rear wheels weighs 3.3 kg.


Frame colours

High gloss paint




TiLite red Neon pink High gloss black

Candy paint




Ruby red Azure blue Electric plum

Metallic paint




Tangerine metallic Acid green metallic Ocean blue metallic

Matte textured paint




Flame orange OD green Hyper blue

Matte paint



Titanium grey Black lava Midnight blue pearl

Pearlescent paint



White pearl Satin



SmartDrive MX2+

SmartDrive's intuitive controls add a power assist for a variety of manual wheelchair scenarios like cruising up hills or over thick carpets. Its lightweight design attaches quickly and its unique OmniWheel design moves with you as you pivot, turn, wheelie, and navigate curbs in style. SmartDrive gives you freedom to do more.



Weight capacity— 150 kg

Specifications

Max user weight	14 – 150 kg
Product dimensions	Length: 15.3" Width: 5.7" Height: 9.5"
Product weight	6 kg drive unit
Driving range*	19.8 km
Motor power	250 W brushless DC
Maximum speed	8.8 km/h
Operating temp	-25°C – 50°C
Chair type compatibility	Rigid, folding, tilt-in-space, one-arm drive, and others


Drive wheel diameter	22", 24", 25", 26"
Warranty	2-Year limited warranty
Bluetooth® LE	FCC ID QOQBT113 IC ID 5123A-BGTBLE113

**Performance measurements will vary based on user and chair characteristics, driving and battery conditions.*

The SmartDrive has been tested and conforms to all applicable requirements of ANSI/RESNA Standards for Wheelchairs - Volume 1 and Volume 2 and EN 12184.

A wheelchair's specifications provided by its manufacturer may be slightly affected by the addition of the SmartDrive.

Cushions & Back Supports

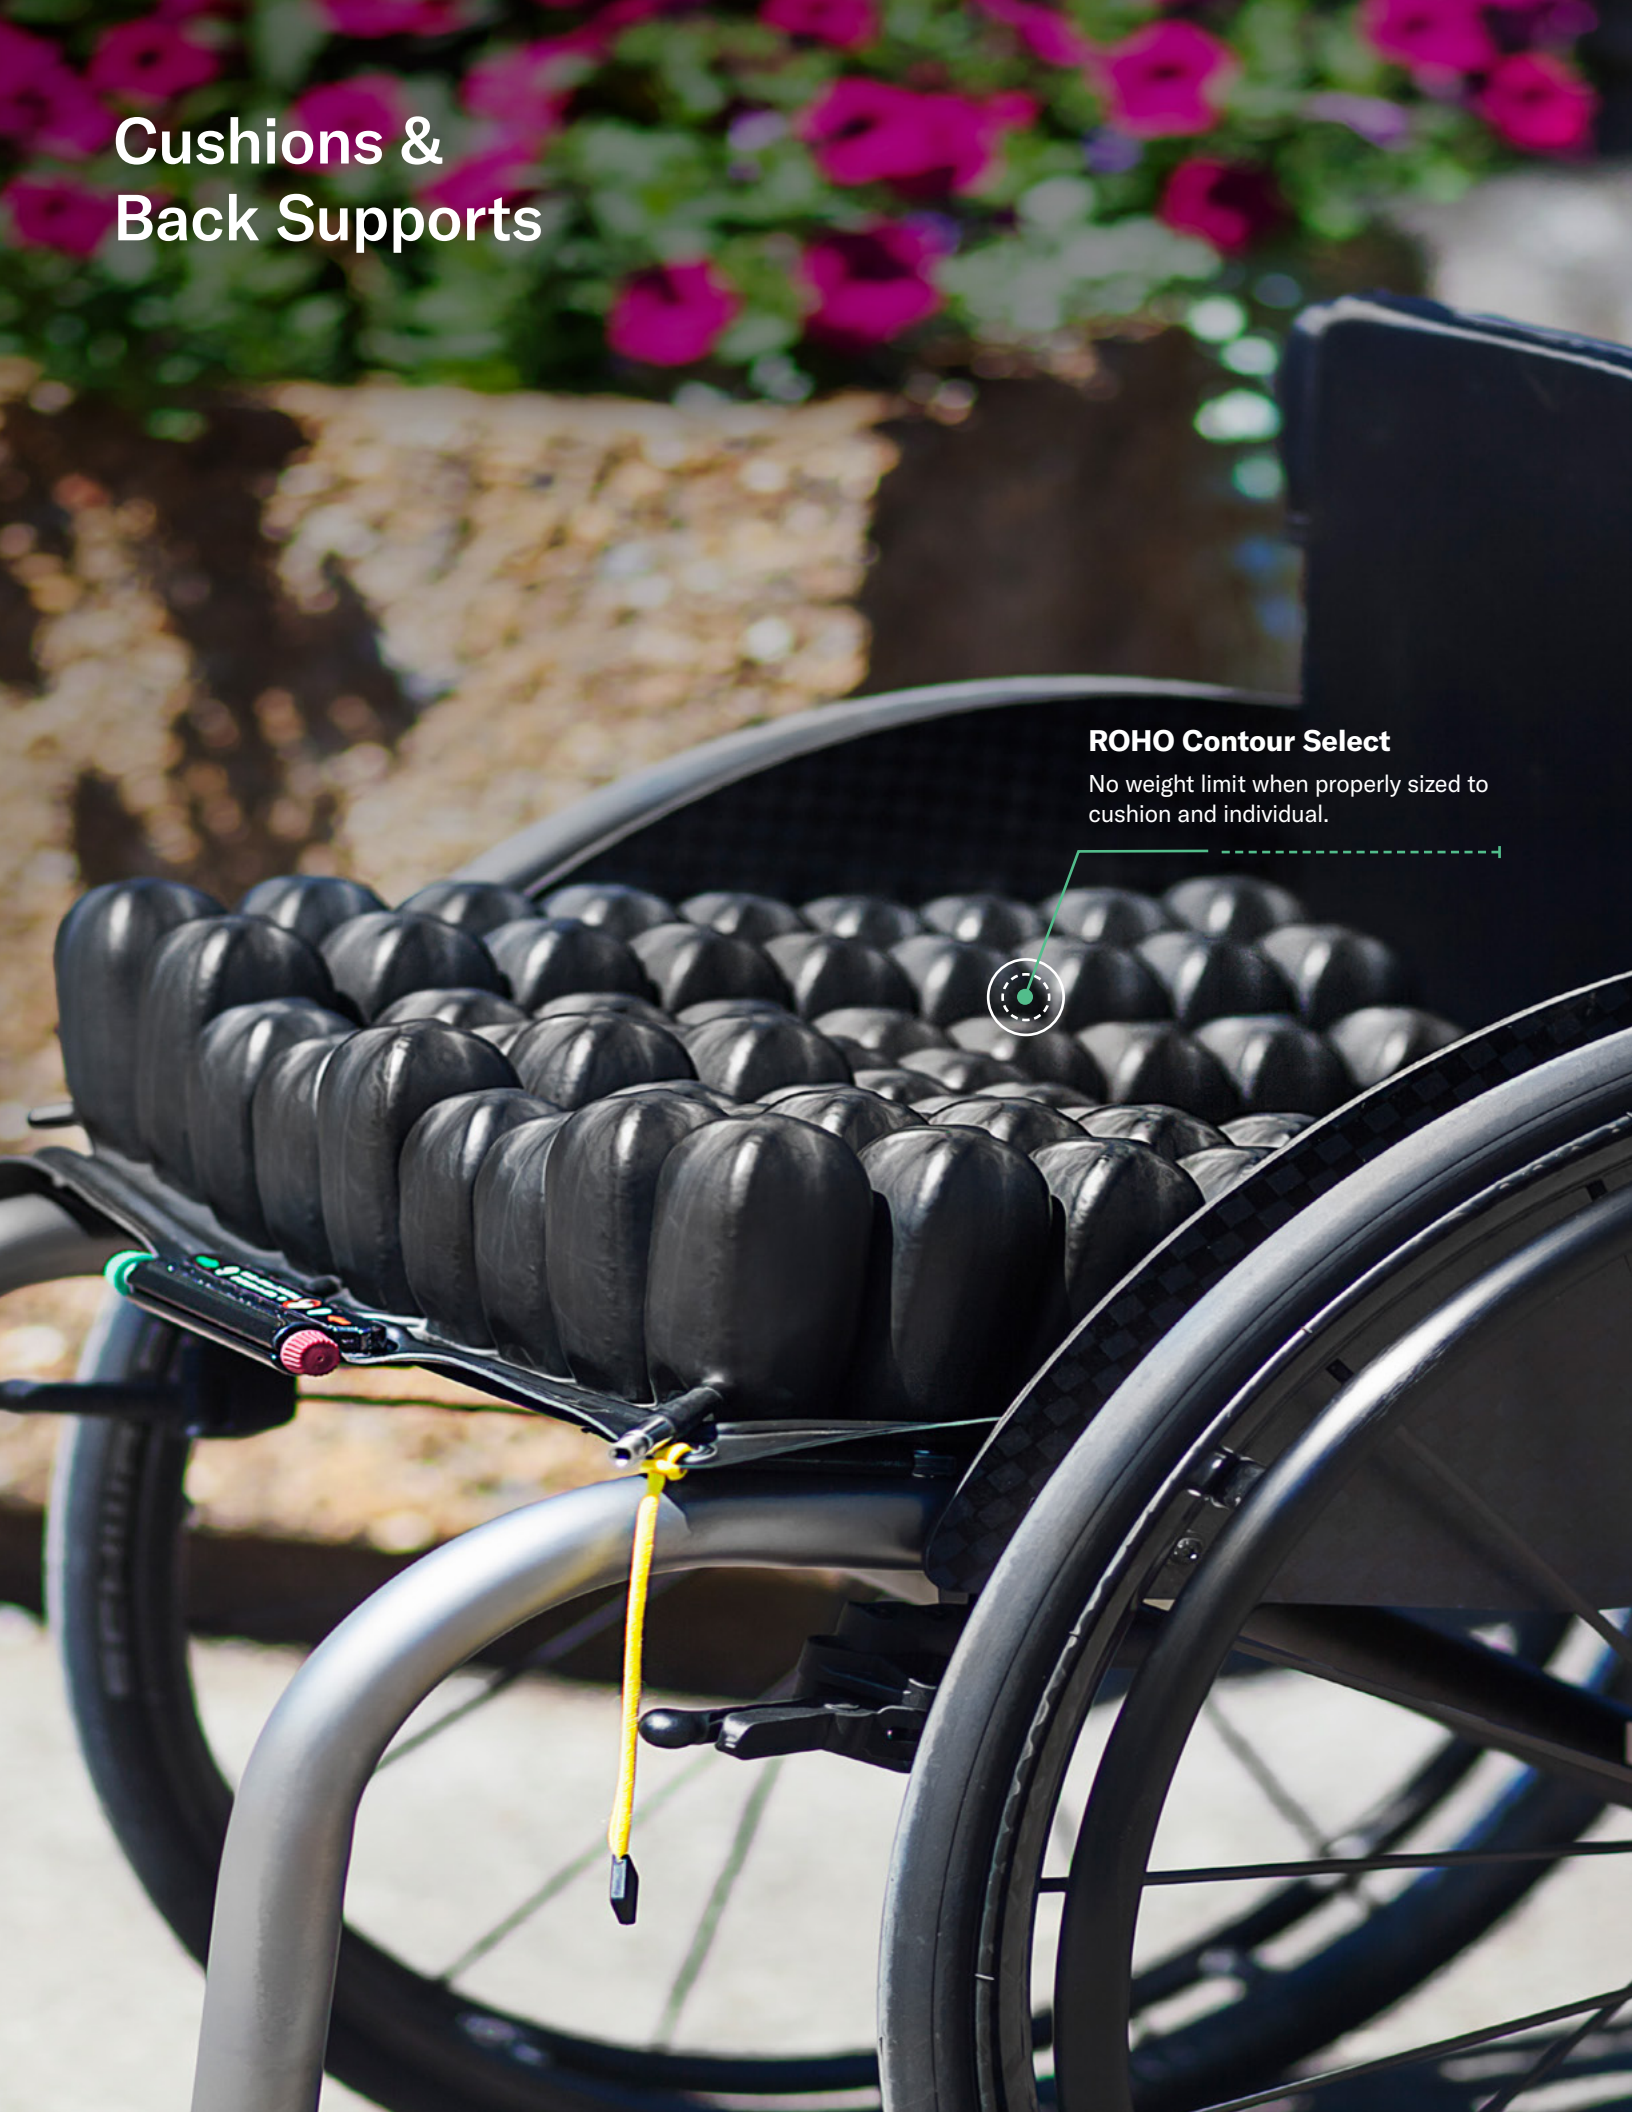

ROHO Contour Select

No weight limit when properly sized to cushion and individual.



ROHO Hybrid Elite SR® Single Compartment

May require accommodation of pelvic asymmetry, up to approx. 2" / 5 cm
May require pelvic and lower extremity positioning and a more stable environment for transfers



ROHO Hybrid Elite® Dual Compartment Cushion*

May require correction of pelvic asymmetry (medial lateral), up to approx. 2" / 5 cm
May require a more stable environment for transfers



ROHO Hybrid Select Cushion

May require correction of pelvic asymmetry (medial lateral), up to approx. 1" / 2.5 cm
May require a more stable environment for transfers

Ideal for individuals who

Dimensions

Weight limit

Min width: 13¾" (35cm)
Max width: 23¾" (60.5cm)
Min depth: 14¾" (37.5cm)
Max depth: 22¾" (58cm)
Height: 3¼ to 4¼" (8.5 to 11cm)*

Available up to 227 kg
*without load.

Min width: 13¾" (35cm)
Max width: 23¾" (60.5cm)
Min depth: 14¾" (37.5cm)
Max depth: 22¾" (58cm)
Height: 3¼ to 4¼" (8.5 to 11cm)*

Available up to 227 kg

Min width: 14" (35.5cm)
Max width: 20" (51cm)
Min depth: 14¾" (37.5cm)
Max depth 20¾" (52.5cm)
Height: 2¼ to 5½" (5.5 to 13cm)*

Available up to 227 kg



ROHO QUADTRO SELECT® HIGH PROFILE® Cushion

May be at risk for or currently have skin/soft tissue breakdown and/or any category/stage pressure injury

Ideal for individuals who

May require accommodation or correction of medial lateral and/or anterior posterior pelvic asymmetries, up to approx. 3" / 7.5 cm

May require different positioning of the left and right femur

Dimensions

Min width: 6 cells; 12¾" (32.5cm)
Max width: 14 cells; 26¼" (67cm)
Min depth: 6 cells; 11¼" (30cm)
Max depth: 14 cells; 25½" (65cm)
Height: 4¼" (10.5cm)

No weight limit on properly sized cushions



ROHO QUADTRO SELECT® MID PROFILE® Cushion

May be at risk for or currently have skin/soft tissue breakdown and/or any category/stage pressure injury

May require accommodation or correction of medial lateral and/or anterior posterior pelvic asymmetries, up to approx. 2" / 5 cm

May require different positioning of the left and right femur

Min width: 7 cells; 14½" (41cm)
Max width: 11 cells; 21¼" (54cm)
Min depth: 7 cells; 13½" (38.5cm)
Max depth: 11 cells; 20¼" (51.5cm)
Height: 3¼" (8.5cm)

No weight limit on properly sized cushions



ROHO CONTOUR SELECT® Cushion

May require accommodation of pelvic asymmetry, up to approx. 1" / 2.5 cm

May need correction of pelvic asymmetry (medial lateral AND anterior posterior)

May require different positioning of the left and right femur

Min width: 7 cells; 14½" (36.5cm)
Max width: 13 cells; 24½" (62.5cm)
Min depth: 8 cells; 15¼" (38.5cm)
Max depth: 12 cells; 22" (56cm)
Height: 2¼ to 4¼" (5.5 to 10.5cm)*

No weight limit on properly sized cushions



ROHO HIGH PROFILE Dual Compartment Cushion

May be at risk for/or currently have skin/soft tissue breakdown and/or any category/stage pressure injury
 May require accommodation of pelvic asymmetry, up to approx. 3" / 7.5 cm
 May require correction of pelvic asymmetry (medial lateral and/or anterior posterior)



ROHO HIGH PROFILE Single Compartment Cushion

May be at risk for/or currently have skin/soft tissue breakdown and/or any category/stage pressure injury
 May require accommodation of pelvic asymmetry, up to approx. 3" / 7.5 cm
 May require maximum amount of immersion and envelopment



ROHO MID PROFILE Single Compartment Cushion

May be at risk for/or currently have skin/soft tissue breakdown and/or any category/stage pressure injury
 May require accommodation of pelvic asymmetry, up to approx. 2" / 5 cm
 May require immersion and envelopment

Ideal for individuals who

Dimensions

Weight limit

Min width: 8 cells; 14¾" (37.5cm)
 Max width: 11 cells; 20" (50.5cm)
 Min depth: 8 cells; 14¾" (37.5cm)
 Max depth: 12 cells; 21¼" (55cm)
 Height: 4¼" (10.5cm)

No weight limit on properly sized cushions

Min width: 6 cells; 11½" (29cm)
 Max width: 15 cells; 26¾" (68cm)
 Min depth: 6 cells; 11½" (29cm)
 Max depth: 14 cells; 25" (63.5cm)
 Height: 4¼" (10.5cm)

No weight limit on properly sized cushions

Min width: 7 cells; 13¼" (33.5cm)
 Max width: 11 cells; 20" (50.5cm)
 Min depth: 7 cells; 13¼" (33.5cm)
 Max depth: 11 cells; 20" (50.5cm)
 Height: 3¼" (8.5cm)

No weight limit on properly sized cushions



ROHO ENHANCER®

May require accommodation of pelvic asymmetry, up to approx. 1" / 2.5 cm
 Require positioning of the pelvis and lower extremities
 May need increased lateral support

Ideal for individuals who

Dimensions

Weight limit

Min width: 8 cells; 14¾" (37.5cm)
 Max width: 11 cells; 20" (50.5cm)
 Min depth: 8 cells; 14¾" (37.5cm)
 Max depth: 11 cells; 20" (50.5cm)
 Height: 2¼ to 4¼" (5.5 to 10.5cm)*

No weight limit on properly sized cushions



Comfort Embrace Cushion

May need postural alignment
 May need support to the greater trochanters

Min width: 10" (25.4cm)
 Max width: 24" (60.1cm)
 Min depth: 10" (25.4cm)
 Max depth: 24" (60.1cm)
 Height: *Zero Elevation: 4" (10cm) *Anti-Thrust: 3.75" (9.5cm)

18" / 46 cm = 136 kg
 20" / 51 cm = 159 kg
 >22" / 56 cm = 181 kg

*Dimensions 16"x16" and larger



Comfort M2 Cushion

May need coccyx relief
 May need postural alignment
 May need support to the greater trochanters

Min width: 10" (25.4cm)
 Max width: 24" (60.1cm)
 Min depth: 10" (25.4cm)
 Max depth: 24" (60.1cm)
 Height: *Zero Elevation & wedge: 4.25" (10.8cm) *Anti-Thrust: 3.75" (9.5cm)

18" / 46 cm = 136 kg
 20" / 51 cm = 159 kg
 >22" / 56 cm = 181 kg



Comfort ACTA-RELIEF® Back Support

May require a significant amount of postural support
 Those who have moderate to severe kyphosis
 May need the maximum amount of trunk support

Ideal for individuals who

Dimensions

Weight limit

Widths: 14" - 20" / 36 cm - 51cm
 Length: 10" - 22" / 25 cm - 56 cm

14" - 18" / 36 cm - 46cm = 113 kg
 20" / 51 cm = 136 kg



Comfort ACTA-EMBRACE® Back Support

Complex user that truly needs a custom fit

Widths: 10" - 24" / 25 cm - 61cm
 Length: 10" - 22" / 25 cm - 56 cm

10" - 18" / 25 cm - 46cm = 113 kg
 20" / 51 cm = 136 kg
 22" / 56 cm = 159 kg
 24" / 61 cm = 181 kg



©2022 Permobil. The following are trademarks and registered trademarks of Permobil: ROHO®, Hybrid Elite®, CONTOUR SELECT®, QUADTRO SELECT®, HIGH PROFILE®, MID PROFILE®, ENHANCER®, ACTA-BACK®, ACTA-EMBRACE®.

Permobil has a policy of continual product improvement and reserves the right to amend this document. The current version of this document is available at permobil.com.



Terry Giles
Custom Fabrication Technician—Power Products

Innovating for individuals.

At Permobil we put the people who use our products first. Our purpose is to innovate for individuals; to create advanced assistive solutions that make the lives of people living with disabilities more enriching. Our dedicated teams work tirelessly to make this happen, no matter if they are

designing a new wheelchair, testing seating cushions, or supporting a therapist. Our founders were passionate about providing a better life for people with mobility impairments, and that same passion still flows through everyone at Permobil.